



Order Code PCQA22

1 or 2 channel,  
configurable

PCQA22

**Model name**

**Measurement range (in mm)**

100 ... 5750 in 10 mm increments

**Output**

- U1 = 0 ... 10 V signal conditioner
- U2 = 0.5 ... 10 V signal conditioner
- U3 = 0 ... 5 V signal conditioner
- I1 = 4 ... 20 mA signal conditioner (3 wire)

**Function and characteristics output 1**

- P1A = Position magnet 1, increasing
- P1D = Position magnet 1, decreasing
- PMU = Start value, direction & end value adjustable by the customer (1 channel only)
- DA = Difference magnet 1/2, increasing (2 magnets required)
- DD = Difference magnet 1/2, decreasing (2 magnets required)

**Function and characteristics output 2 (option)**

- P2A = Position magnet 2, increasing
  - P2D = Position magnet 2, decreasing
  - DA = Difference magnet 1/2, increasing
  - DD = Difference magnet 1/2, decreasing
- } 2 magnets required

VZx.x = Velocity with direction detection (with 1 magnet only)

VZx.x = Velocity in steps of 0.1 m/s

Example: VZ1.5	towards start position		towards end position
	-1.5 m/s	0	+1.5 m/s
Output U1:	0 V	5 V	10 V
Output I1:	4 mA	12 mA	20 mA

VAx.x = Velocity without direction detection (with 1 magnet only)

VAx.x = Velocity in steps of 0.1 m/s

Example: VA1.5	towards start position		towards end position
	-1.5 m/s	0	+1.5 m/s
Output U1:	10 V	0 V	10 V
Output I1:	20 mA	4 mA	20 mA

**Linearity**

L02 / L02MM / L10 (for definition see "Specifications" above)

**Connection**

- M12 = Connector M12, 8 pin
- KAB2M = Cable, standard length 2 m, other lengths upon request

Custom outputs are available upon request.

**1. Order example: PCQA22 - 1000 - U1 - P1D - L10 - M12**

Square profile, measurement range 1000 mm, 1 voltage output 0 ... 10 V (U1)  
Output 1: Position magnet 1, decreasing signal (P1D)  
Output 2: Not used

**2. Order example: PCQA22 - 1000 - I1 - P1A - P2D - L10 - M12**

Square profile, measurement range 1000 mm, 2 current outputs 4 ... 20 mA (I1)  
Output 1: Position magnet 1, increasing signal (P1A)  
Output 2: Position magnet 2, decreasing signal (P2D)


**3. Order example: PCQA22 - 1000 - U1 - P1A - VZ1.0 - L10 - M12**

Square profile, measurement range 1000 mm, 2 voltage outputs 0 ... 10 V (U1)  
Output 1: Position magnet 1, increasing signal (P1A)  
Output 2: Velocity magnet 1, -1 m/s ... 1 m/s for range 0 ... 10 V (VZ1.0)



**POSICHRON® position sensor in square profile**

- Protection class IP64
- Measurement range 0 ... 100 to 0 ... 5750 mm
- Absolute position measurement
- Easy installation with mounting brackets
- Wire-free position magnet
- Contact-free
- Also available with guided position magnet
- Multi-magnet operation
- Pulse output (start/stop)



<b>Specifications</b>	Output	Pulse output (start/stop)
	Resolution	Essentially infinite
	Sampling rate	Up to 1 kHz, depending on the measurement range
	Linearity	Ranges >500 mm: L10 = ±0.10 % f.s. L02 = ±0.02 % f.s. Ranges ≤500 mm: L10 = ±0.5 mm L02MM = ±0.2 mm
	Repeatability	±3 µm
	Housing material	AlMgSi1 / Zn / V4A
	Protection class	IP64 (connector version: with mating connector only)
	Shock	EN 60068-2-27:1993, 50 g 11 ms, 100 shocks
	Vibration	EN 60068-2-6:1995, 20 g 10 Hz-2 kHz, 10 cycles
	Connection	8 pin socket M12 / cable 2 m
EMC, temperature	Refer to output specification	

**Order Code PCQA22**

**Model name** PCQA22 -   -   -   -  

**Measurement range (in mm)**  
100 ... 5750 in 10 mm increments  
Other ranges on request

**Output**  
STSP = Pulse output (start/stop)

**Linearity**  
L02 / L02MM / L10 (for definition see "Specifications" above)

**Connection**  
M12 = Connector M12, 8 pin  
KAB2M = Cable, standard length 2 m, other lengths upon request

Order code mounting set (see page 22)

PCQA-BFS1

Order code position magnet/slider (see page 23)

PCMAG ...

Order code mating connecting cable (see page 77)


KAB-...M-M12/8F/G-LITZE

**Order example: PCQA22 - 2000 - STSP - L10 - M12**




**POSICHRON® position sensor in square profile**

- Protection class IP64
- Measurement range 0 ... 100 to 0 ... 5750 mm
- Absolute position measurement
- Easy installation with mounting brackets
- Wire-free position magnet
- Contact-free
- Also available with guided position magnet
- Synchronous serial interface (SSI)



Specifications		
Output	Synchronous serial interface (SSI)	
Resolution	5, 10, 20, 50, 100 µm	
Sampling rate	Up to 500 Hz depending on the measurement range	
Linearity	Ranges >500 mm: L10 = ±0.10 % f.s. L02 = ±0.02 % f.s. Ranges ≤500 mm: L10 = ±0.5 mm L02MM = ±0.2 mm	
Repeatability	±3 µm	
Housing material	AlMgSi1 / Zn / V4A	
Protection class	IP64 (connector version: with mating connector only)	
Shock	EN 60068-2-27:1993, 50 g 11 ms, 100 shocks	
Vibration	EN 60068-2-6:1995, 20 g 10 Hz-2 kHz, 10 cycles	
Connection	8 pin socket M12 / cable 2 m	
EMC, temperature	Refer to output specification	

**Order Code PCQA22**

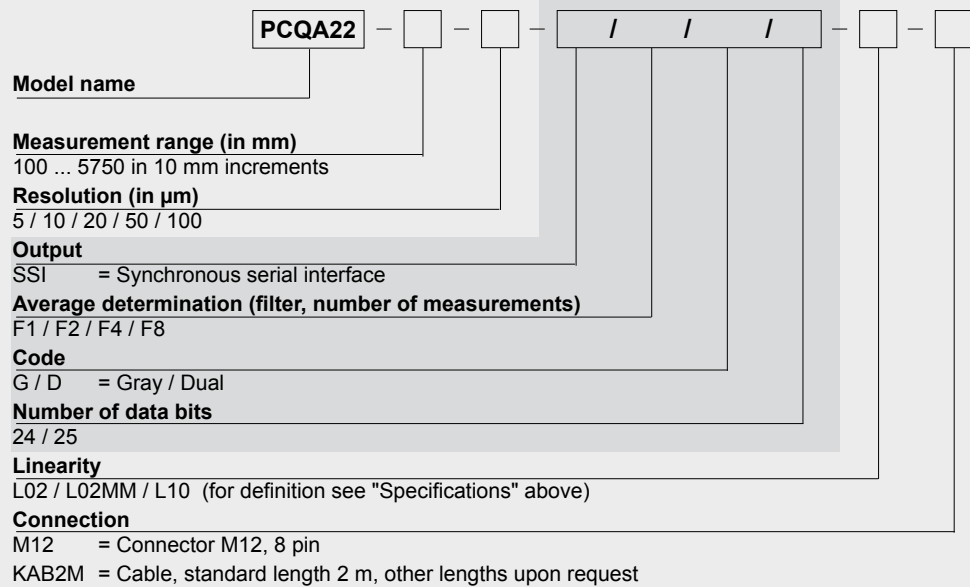

Order code mounting set (see page 22)

**PCQA-BFS1**

Order code position magnet/slider (see page 23)

**PCMAG ...**

Order code mating connecting cable (see page 77)


**KAB-...M-M12/8F/G-LITZE**

**Order example: PCQA22 - 2500 - 5 - SSI/F8/G/24 - L10 - M12**



**POSICHRON® position sensor in square profile**

- Protection class IP64
- Measurement range 0 ... 100 to 0 ... 5750 mm
- Absolute position measurement
- Easy installation with mounting brackets
- Wire-free position magnet
- Contact-free
- Also available with guided position magnet
- CANopen bus



<b>Specifications</b>	Output	CANopen bus
	Resolution	50 µm
	Sampling rate	Up to 1 kHz, depending on the measurement range
	Linearity	Ranges >500 mm: L10 = ±0.10 % f.s. L02 = ±0.02 % f.s. Ranges ≤500 mm: L10 = ±0.5 mm L02MM = ±0.2 mm
	Repeatability	±3 µm
	Housing material	AlMgSi1 / Zn / V4A
	Protection class	IP64 (with mating connector only)
	Shock	EN 60068-2-27:1993, 50 g 11 ms, 100 shocks
	Vibration	EN 60068-2-6:1995, 20 g 10 Hz-2 kHz, 10 cycles
	Connection	5 pin socket M12
EMC, temperature	Refer to output specification	

**Order Code PCQA22**

**Model name**

**Measurement range (in mm)**

100 ... 5750 in 10 mm increments  
Other ranges on request

**Output**


CANOP = CANopen bus  
CANOP/RT = CANopen-Bus with integrated terminating resistance

**Linearity**

L02 / L02MM / L10 (for definition see "Specifications" above)

**Connection**

M12A5 = Connector M12, 5 pin



Order code mounting set (see page 22)

**PCQA-BFS1**

Order code position magnet/slider (see page 23)




**PCMAG ...**

Order code bus cable (see page 79)

**KAB-...M-M12/5F/G-M12/5M/G**

**Order example: PCQA22 - 2000 - CANOP - L10 - M12A5**


# POSICHRON<sup>®</sup> PCQA22 Square Profile Housing

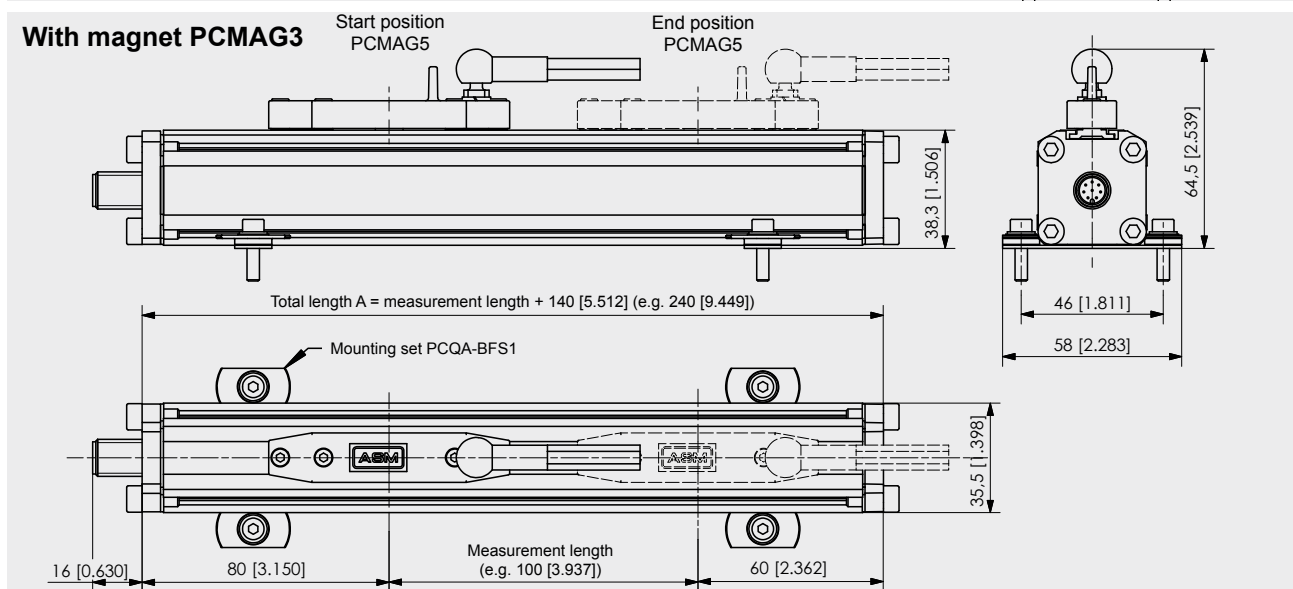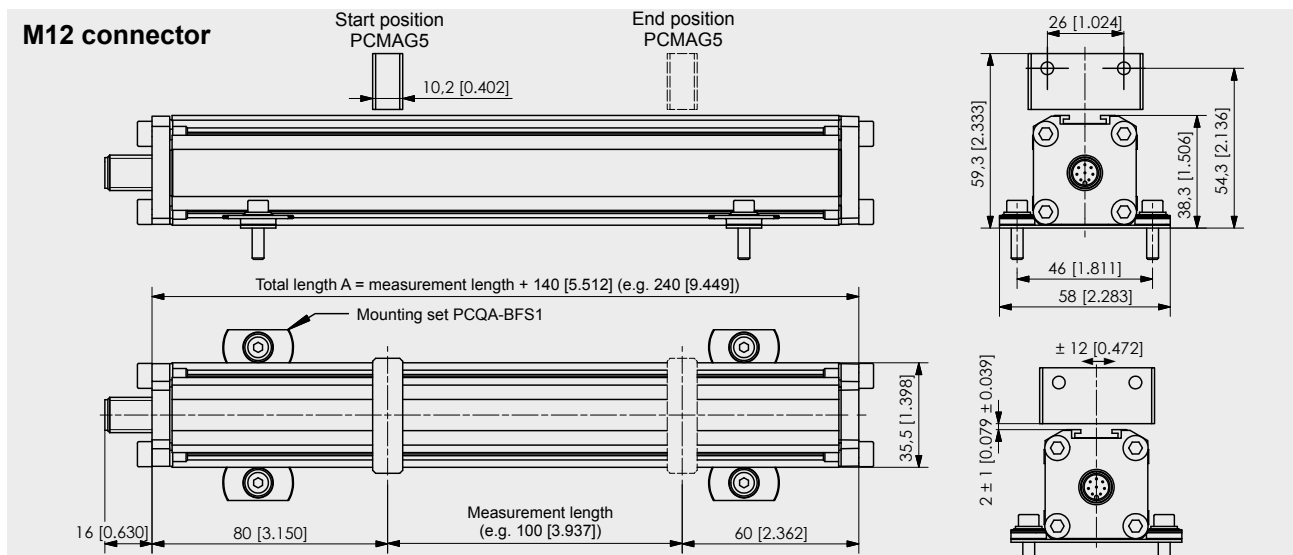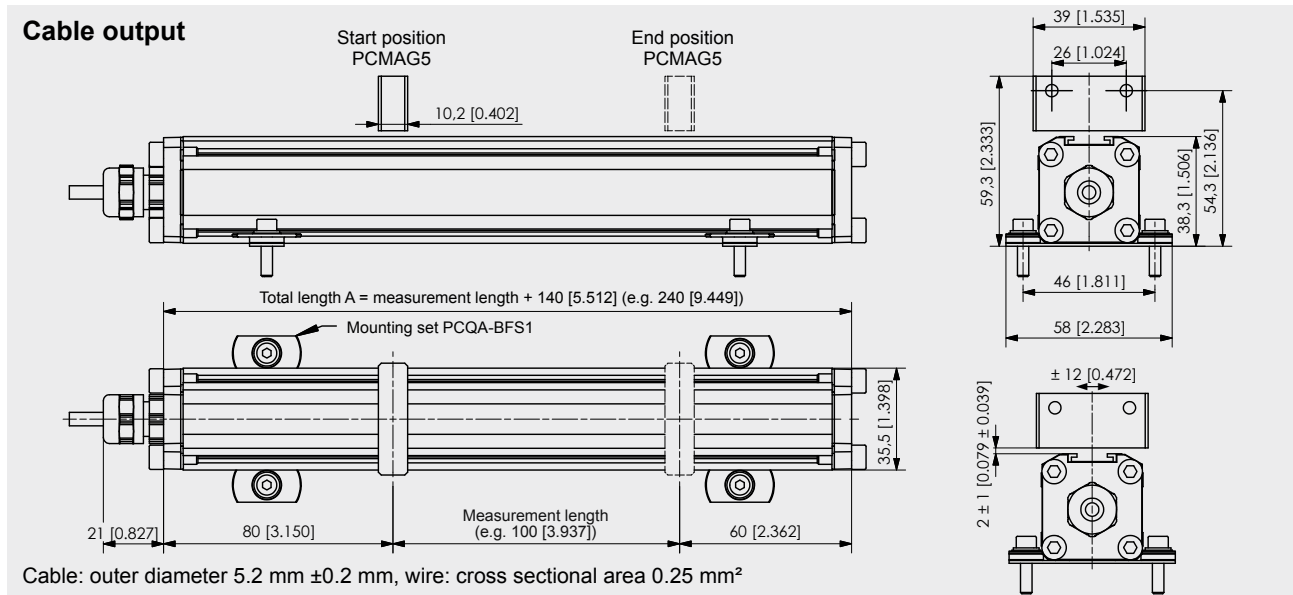

Dimensions in mm [inch]


Dimensions informative only. For guaranteed dimensions consult factory.

**Mounting set  
 PCQA-BFS1 with  
 mounting clamps**

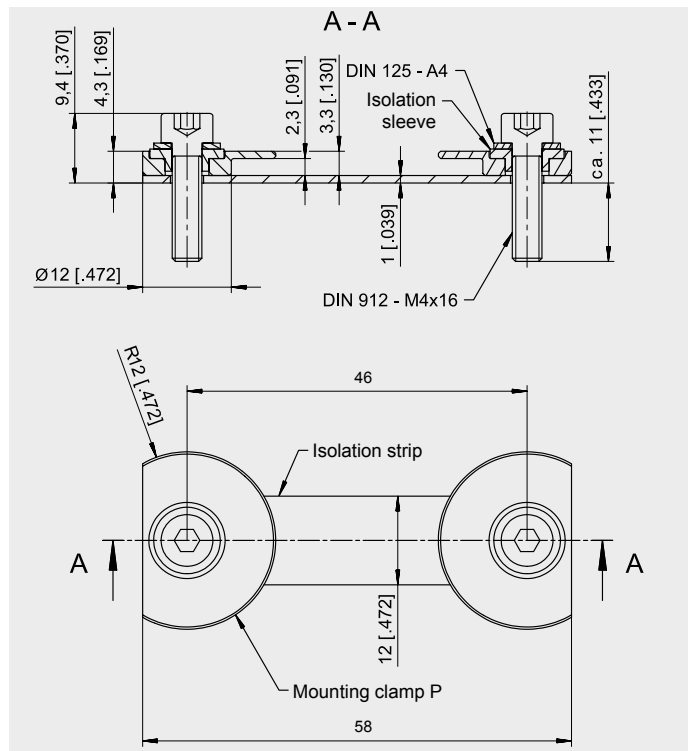

**Option -BFW  
 Mounting brackets  
 for PCQA22 to  
 PCQA24**

**Note:** The option -BFW can only be ordered with a new sensor, not separately! Applicable for sensor lengths up to 1000 mm.

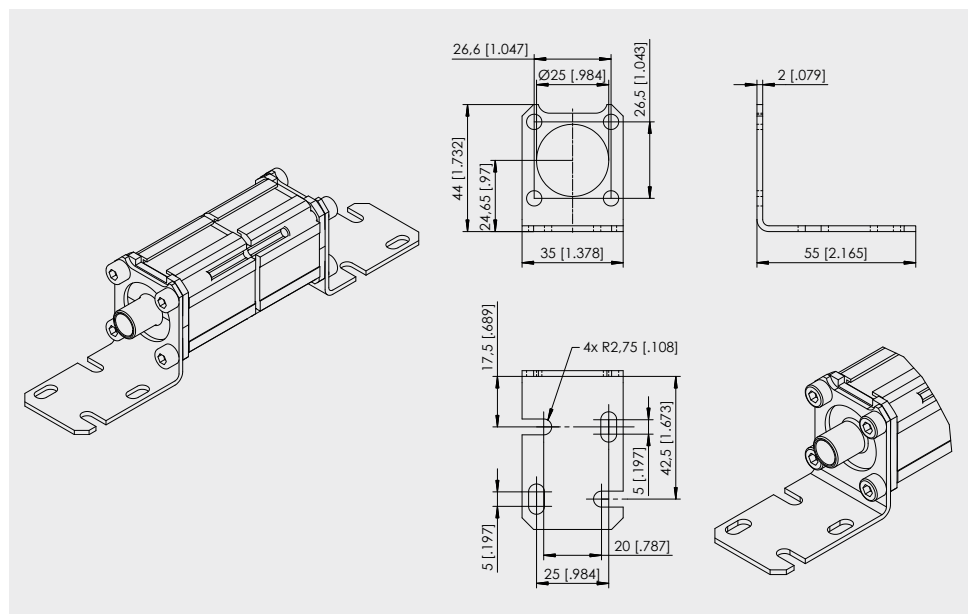


Dimensions in mm [inch]  
 Dimensions informative only.  
 For guaranteed dimensions consult factory.

**Order example: PCQA24 - 1000 - STSP - L10 - M12 - BFW**



**POSICHRON<sup>®</sup>**  
**PCQA**  
**Mounting Sets - Magnets**




**Option -BFW**  
**Mounting brackets**  
**for PCQA23**  
 (continuation)

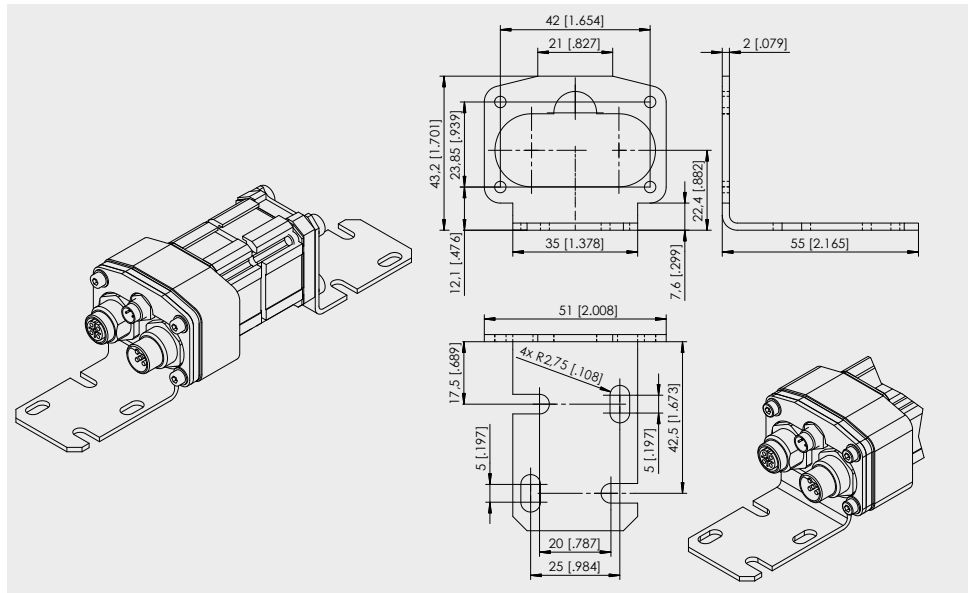

**PCMAG5**  
 Standard magnet

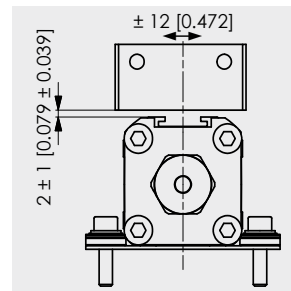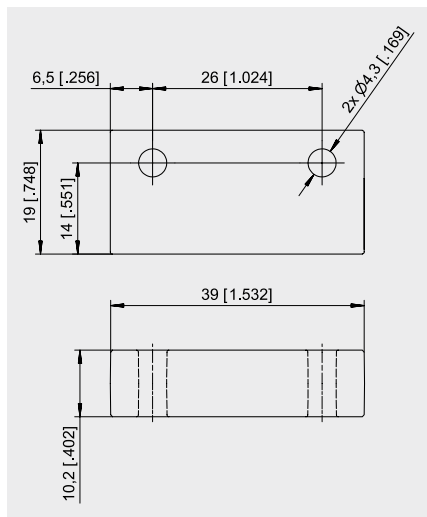

**PCMAG3**  
 Guided magnet  
 slider with internal  
 position magnet

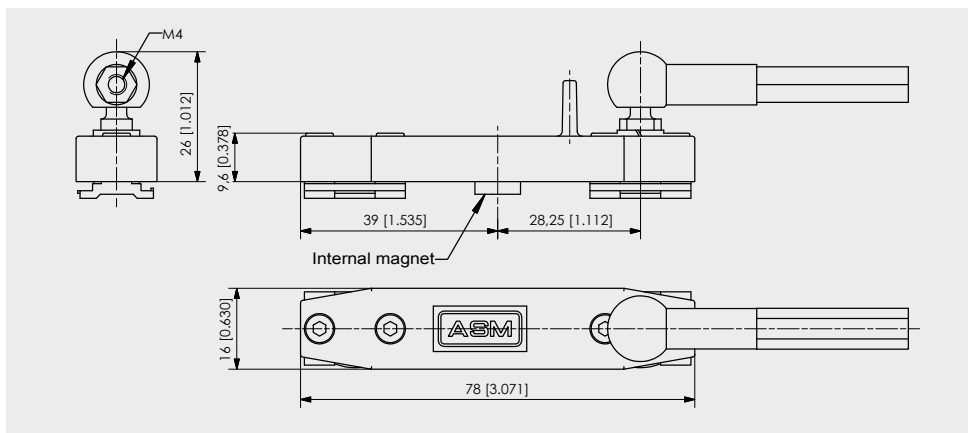

Dimensions in mm [inch]

Dimensions informative only.  
 For guaranteed dimensions consult factory.



# POSICHRON®


## Output Specification 10V and 420T

### Industry Standard




<b>Signal conditioner 10V</b> Voltage output 	Excitation voltage	18 ... 27 V DC (18 ... 36 V DC as option)
	Excitation current	Typ. 50 mA, 80 mA max.
	Output voltage	0 ... 10 V DC
	Output current	2 mA max.
	Output load	> 5 kΩ
	Resolution	Essentially infinite
	Stability (temperature)	$\pm 50 \times 10^{-6} / ^\circ\text{C}$ f.s.
	Protection	Reverse polarity, short circuit
	Output noise	0.5 mV <sub>RMS</sub>
	Operating temperature	-40 ... +85 °C
Immunity to interference (EMC)	According to EN 61326:2004	

#### Signal diagram

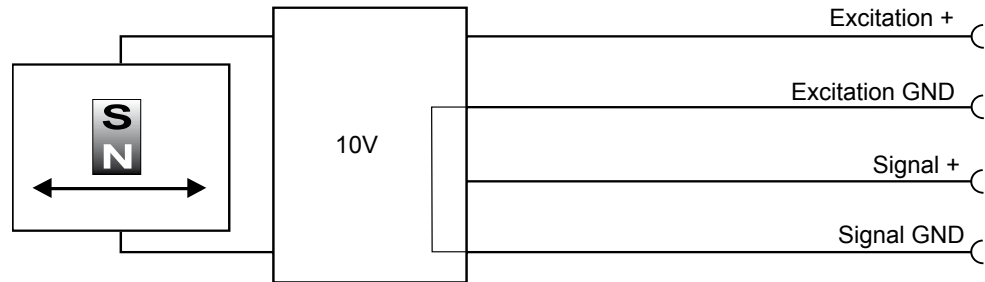

<b>Signal conditioner 420T</b> Current output (3 wire) 	Excitation voltage	18 ... 27 V DC (18 ... 36 V DC as option)
	Excitation current	Typ. 70 mA, 80 mA max.
	Load resistor	350 Ω max.
	Output current	4 ... 20 mA, 30 mA max. (at failure)
	Resolution	Essentially infinite
	Stability (temperature)	$\pm 50 \times 10^{-6} / ^\circ\text{C}$ f.s.
	Protection	Reverse polarity, short circuit
	Output noise	0.5 mV <sub>RMS</sub>
	Operating temperature	-40 ... +85 °C
	Immunity to interference (EMC)	According to EN 61326:2004

#### Signal diagram

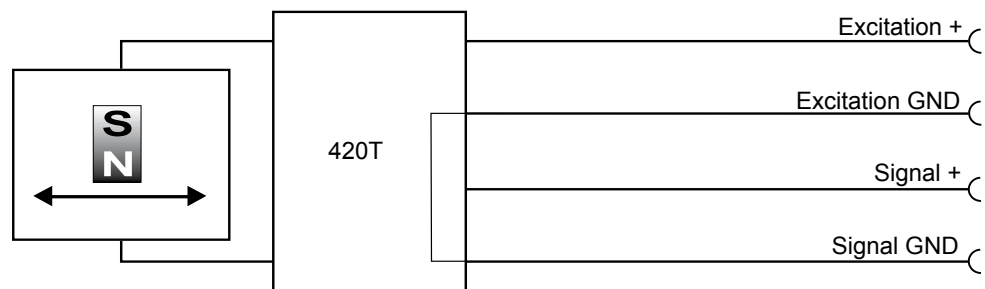


Signal wiring	Output signals 10V, 420T	Connector pin	Cable output color * (not for PCST27 and PCR32)
	Excitation +	1	white
	Excitation GND	2	brown
	Signal +	3	green
	Signal GND	4	yellow

#### Connection

Mating connector

View to sensor connector

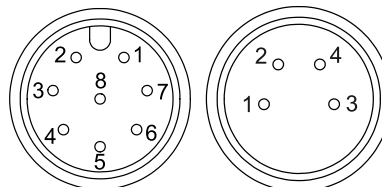

CONN-M12-8M

CONN-M8-4M

**\* Please note the different colors of the assembled accessory cable!**

# POSICHRON®


## Output Specification U1, U2, U3 and I1

### Configurable, 1 or 2 channels




<b>Signal conditioner</b> <b>U1, U2, U3</b> Voltage output 	Excitation voltage	18 ... 27 V DC
	Excitation current	Typ. 35 mA, 80 mA max.
	Output voltage	U1: 0 ... 10 V; U2: 0.5 ... 10 V; U3: 0 ... 5 V
	Output current	2 mA max.
	Output load	> 5 kΩ
	Resolution	16 bit
	Stability (temperature)	$\pm 50 \times 10^{-6} / ^\circ\text{C}$ f.s.
	Protection	Reverse polarity, short circuit
	Output noise	0.5 mV <sub>RMS</sub>
	Operating temperature	-40 ... +85 °C
Immunity to interference (EMC)	According to EN 61326:2004	

#### Signal diagram

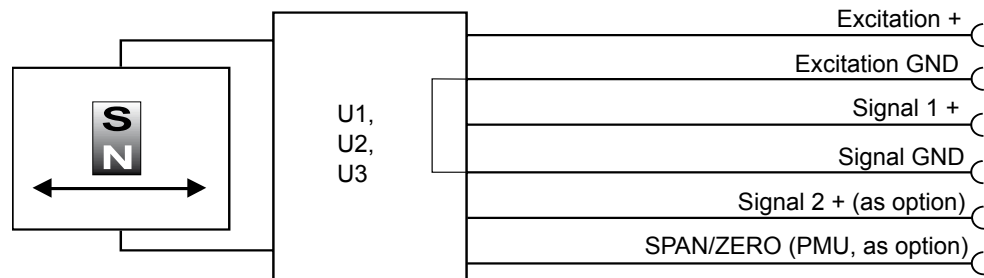

<b>Signal conditioner</b> <b>I1</b> Current output (3 wire) 	Excitation voltage	18 ... 27 V DC
	Excitation current	Typ. 60 mA, 80 mA max.
	Load resistor	350 Ω max.
	Output current	4 ... 20 mA, 30 mA max (at failure)
	Resolution	16 bit
	Stability (temperature)	$\pm 50 \times 10^{-6} / ^\circ\text{C}$ f.s.
	Protection	Reverse polarity, short circuit
	Output noise	0.5 mV <sub>RMS</sub>
	Operating temperature	-40 ... +85 °C
	Immunity to interference (EMC)	According to EN 61326:2004

#### Signal diagram

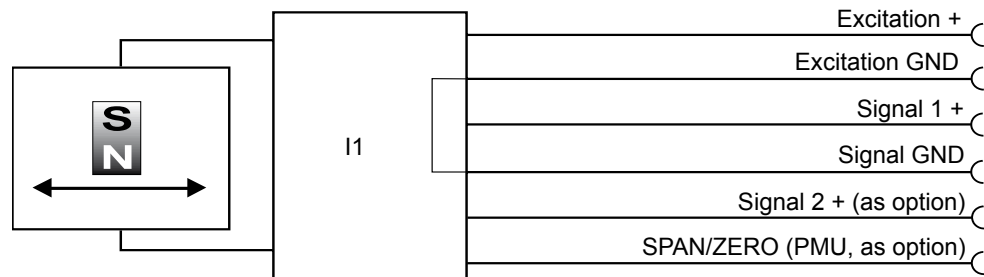

Signal wiring	Output signals U1, U2, U3, I1	Connector pin	Cable output, wire color (not for PCST27 and PCR32)
	Excitation +	1	white
	Excitation GND	2	brown
	Signal 1 +	3	green
	Signal GND	4	yellow
	Signal 2 + (as option *)	5	grey
	SPAN/ZERO (PMU **, as option)	6	pink


\* When using multiple magnets the distance between two magnets must be min. 70 mm to identify the single magnets definitely.

\*\* Description page 59

#### Connection

Mating connector

View to  
sensor  
connector




CONN-M12-8M

# POSICHRON® Output Specification Pulse Interface STSP




## Pulse interface STSP




Excitation voltage	18 ... 27 V DC, residual ripple 10 mV <sub>SS</sub>
Excitation current	Typ. 60 mA, 150 mA max.
Stability (temperature)	±50 x 10 <sup>-6</sup> / °C f.s.
Wave velocity v <sub>s</sub>	2600 ... 2900 m/s
Level INIT and START/STOP	RS422
Protection	Reverse polarity, short circuit
Operating temperature	-40 ... +85 °C
EMC	According to EN 61326:2004

## Signal diagram

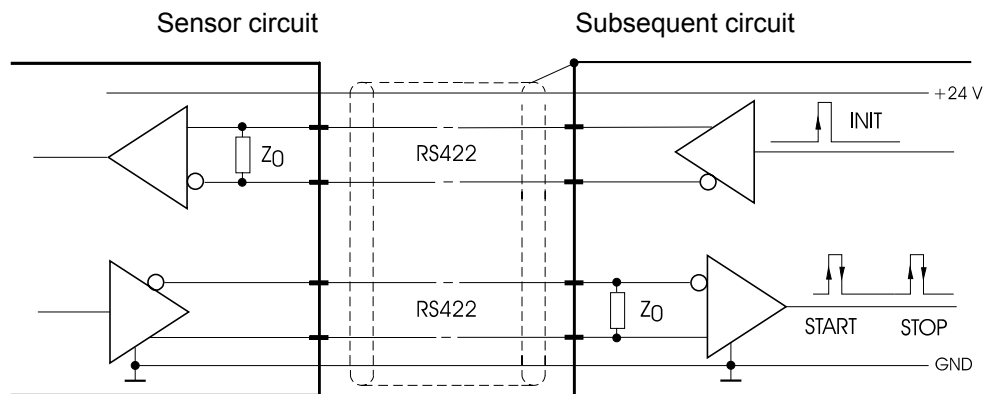

The subsequent circuit generates a request pulse via the INIT line. The position sensor responds with a START and a STOP signal.

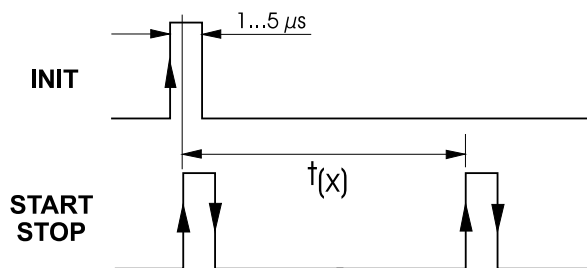

To calculate the position value the time interval  $t_{(x)}$  must be multiplied with the conversion factor  $v_s$  specified on the type label.


$$\text{Position value } x = t_{(x)} \cdot v_s$$

When using multiple magnets every single magnet generates its own STOP signal. To identify the single magnets definitely the distance between two magnets must be min. 70 mm.

Signal wiring	Pulse interface	Connector pin	Cable output color (not for PCST27 and PCRP32)
Excitation +		1	white
Excitation GND		2	brown
INIT		3	green
INIT		4	yellow
STSP		5	grey
STSP		6	pink

## Connection Mating connector

View to sensor  
connector



CONN-M12-8M


# POSICHRON® Output Specification SSI




## Description

The data transmission takes place by means of the two signals CLOCK and DATA. The processing unit (PLC, microcomputer) sends pulse sequences which clock the data transmission at the required transfer rate. With the first falling edge of the pulse sequence the position of the sensor is recorded and stored. The following rising edges control the bit-by-bit transfer of the data word. After a delay time the next new position information can be transmitted.

## Data format (Train of 26 pulses)

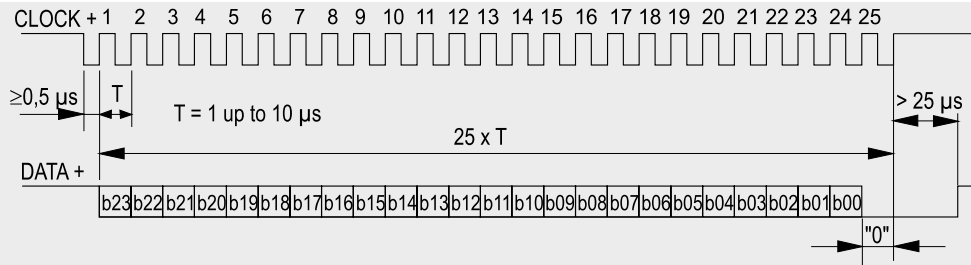


## Synchronous serial interface SSI



Output	RS422
Excitation voltage	18 ... 27 V DC, residual ripple 10 mV <sub>SS</sub>
Excitation current	Typ. 80 mA, 150 mA max.
Clock frequency	100 kHz ... 1 MHz
Code	Gray code, dual code
Resolution	≥ 5 μm
Delay between pulse trains	>25 μs
Filter	Average determination, see page 59
Stability (temperature)	±50 x 10 <sup>-6</sup> / °C f.s.
Operating temperature	-40 ... +85 °C
Immunity to interference EMC	According to EN 61326:2004

## Signal diagram

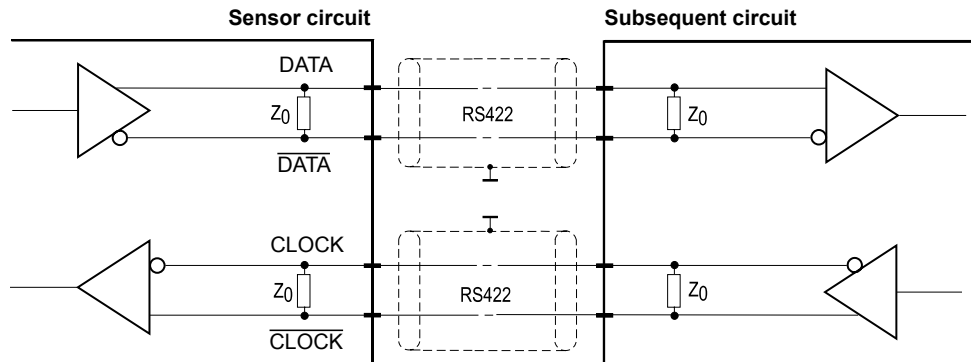


Cable length	Baud rate
50 m	100-1000 kHz
100 m	100-300 kHz

**Note:**  
Extension of the cable length will reduce the maximum transmission rate.  
The signals CLOCK/CLOCK and DATA/DATA must be connected in a twisted pair cable, common shielded.

## Signal wiring

Signal name	Connector pin	Cable output color (not for PCST27 and PCR32)
Excitation +	1	white
Excitation GND	2	brown
CLOCK	3	green
CLOCK	4	yellow
DATA	5	grey
DATA	6	pink

View to sensor connector



CONN-M12-8M


# POSICHRON® Output Specification CANopen

PRELIMINARY



## Description

CANopen interface with process data for position and cam functions, programmable are preset, resolution, filtering and cam switching points.


Interface CANOP 	Communication profile	CANopen CiA 301 V 4.02, Slave
	Encoder profile	Encoder CiA 406 V 3.2
	Error Control	Node Guarding, Heartbeat, Emergency Message
	Node ID	Adjustable via LSS or via object dictionary
	PDO	4 TxPDO, 0 RxPDO, no linking, static mapping
	PDO Modes	Event-/Time triggered, Remote-request, Sync cyclic/acyclic
	SDO	1 server, 0 client
	CAM	2 cams
	Certified	Yes
	Transmission rates	50 kBaud to 1 MBaud, adjustable via LSS or via object dictionary
	Nodes	127 max.
	Bus connection	M12 connector, 5 pins
	Integrated bus terminating resistor	As option (output CANOP/RT)
Bus, galvanic isolated	No	

Specifications	Excitation voltage	18 ... 36 V DC
	Excitation current	Max. 100 mA
	Number of position magnets	1 ... 4
	Resolution	50 µm
	Measuring rate	1 kHz (asynchronous)
	Stability (temperature)	±50 x 10 <sup>-6</sup> / °C f.s.
	Repeatability	1 LSB
	Operating temperature	-40 ... +85 °C
	Protection	Reverse polarity, short circuit
	Dielectric strength	1 kV (V AC, 50 Hz, 1 min.)
	Environment - EMC Automation	EN 61326:2004


When using multiple magnets the distance between two magnets must be min. 70 mm to identify the single magnets definitely.

Signal wiring / connection	Signal name	Connector pin (color)
	Shield	1 (grey)
	Excitation +	2 (white)
	GND	3 (brown)
	CAN-H	4 (green)
	CAN-L	5 (yellow)

View to sensor connector



## CAN bus wiring

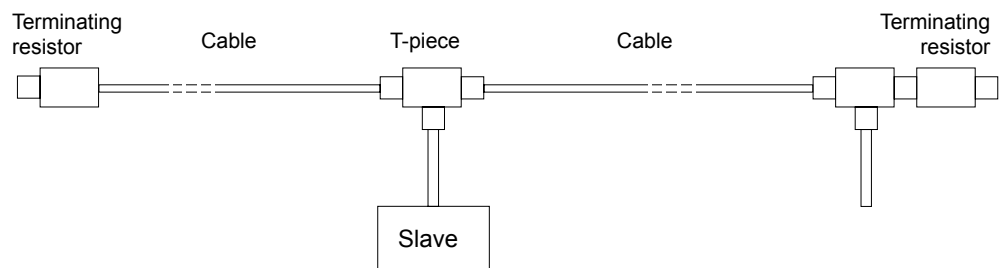

# POSICHRON® Accessories Connector Cables




**Connector cable for POSICHRON® position sensors**  
8 pin M12

The 8-lead shielded cable is supplied with a mating 8-pin 90° M12 connector at one end and 8 wires at the other end. Available lengths are 2, 5 and 10 m. Wire: cross sectional area 0.14 mm<sup>2</sup>.

Order code:

**KAB - XM - M12/8F/W - LITZE**  
**IP69K: KAB - XM - M12/8F/W/69K - LITZE**

Length in m

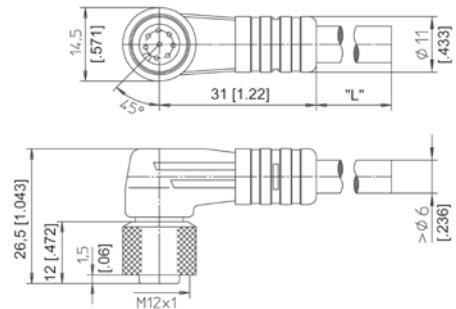


**Connector cable for POSICHRON® position sensors**  
8 pin M12

The 8-lead shielded cable is supplied with a mating 8-pin M12 connector at one end and 8 wires at the other end. Available lengths are 2, 5 and 10 m. Wire: cross sectional area 0.14 mm<sup>2</sup>.

Order code:

**KAB - XM - M12/8F/G - LITZE**  
**IP69K: KAB - XM - M12/8F/G/69K - LITZE**

Length in m

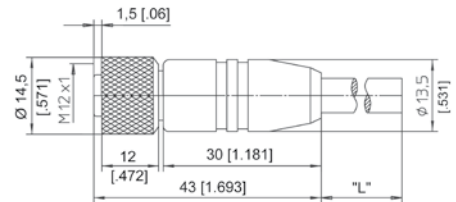


Connector cable wiring - M12, 8 pin	Connector pin / cable color							
	1	2	3	4	5	6	7	8
	White	Brown	Green	Yellow	Grey	Pink	Blue	Red

# POSICHRON® Accessories Connector Cables



**Connector/bus cable for POSICHRON® position sensors**  
5 pin M12  
CAN bus/DeviceNet

The 5-lead shielded cable is supplied with a female 5-pin M12 connector at one end and a male 5-pin M12 connector at the other end. Available lengths are 0.3, 2, 5 and 10 m.

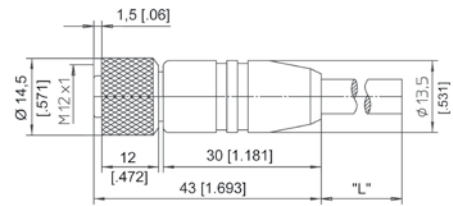


Order code:

**KAB - XM - M12/5F/G - M12/5M/G**  
**IP69K: KAB - XM - M12/5F/G/69K - M12/5M/G/69K**  
 Length in m ↑

**T-piece for bus cable**  
5 pin M12  
CAN bus/DeviceNet

**KAB - TCONN - M12/5M - 2M12/5F**

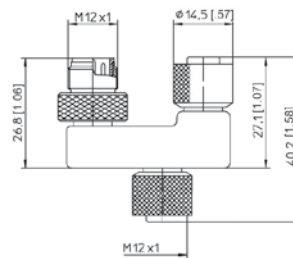

**Terminating resistance**  
5 pin M12  
CAN bus/DeviceNet

**KAB - RTERM - M12/5M/G**



**Cable set for POSICHRON® position sensors PROFIBUS**

The cable set consists of one cable each of the following type :

- Cable set 1: Bus input, bus output, sensor excitation
- Cable set 2: Bus input, terminating resistor, sensor excitation

Available lengths are 2, 5 and 10 m

Order Code:

**KABS1-PCQA23-PROF-XM-LITZE**  
 Length in m ↑

**KABS2-PCQA23-PROF-XM-LITZE**  
 Length in m ↑

Separate cables on request.